

3-8-00
FISH & RICHARDSON P.C.

A
225 Franklin Street
Boston, Massachusetts
02110-2804

Telephone
617 542-5070

Facsimile
617 542-8906

Web Site
www.fr.com

March 7, 2000

Attorney Docket No.: 11699-002001

Box Patent Application

Assistant Commissioner for Patents
Washington, DC 20231

Presented for filing is a new original patent application of:

Applicant: Miladin P. Lazarov and Isabella Mayer

Title: Biocompatible Article

Enclosed are the following papers, including those required to receive a filing date under 37 CFR 1.53(b):

	Pages
Specification	16
Claims	3
Abstract	1
Declaration	[To be Filed at a Later Date]
Drawing(s)	3

Enclosures:

- A certified copy of the priority application will be filed at a later date.
- Postcard.

Under 35 USC 119, this application claims the benefit of foreign priority application filed in Germany, serial number 199 50 386.9 filed October 19, 1999.

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL485681912

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Date of Deposit

March 7, 2000

Signature

Typed or Printed Name of Person Signing Certificate

JC542 U.S. PTO
09/521086
03/07/00

BOSTON

DELAWARE

NEW YORK

SAN DIEGO

SILICON VALLEY

TWIN CITIES

WASHINGTON, DC

03/07/00
JC377 U.S. PTO
Frederick P. Fish
1855-1930
W.K. Richardson
1859-1951

09/521086 03/07/00

FISH & RICHARDSON P.C.

Assistant Commissioner for Patents

March 7, 2000

Page 2

Basic filing fee	\$690
Total claims in excess of 20 times \$18	\$0
Independent claims in excess of 3 times \$78	\$0
Fee for multiple dependent claims	\$130
Total filing fee:	\$820

A check for the filing fee is enclosed. Please apply any other required fees or any credits to deposit account 06-1050, referencing the attorney docket number shown above.


If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at (617) 542-5070.

Kindly acknowledge receipt of this application by returning the enclosed postcard.

Please send all correspondence to:

GILBERT H. HENNESSEY
Fish & Richardson P.C.
225 Franklin Street
Boston, MA 02110-2804

Respectfully submitted,

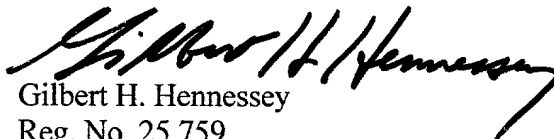

Gilbert H. Hennessey

Reg. No. 25,759

Enclosures

GHH/pdt

20035280.doc

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: BIOCOMPATIBLE ARTICLE
APPLICANT: MILADIN P. LAZAROV AND ISABELLA MAYER

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL485681912

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Date of Deposit March 7, 2000

Signature

Typed or Printed Name of Person Signing Certificate

Biocompatible article

5 The invention relates to an, in particular biocompatible, article, in particular an implant such as a stent, to a process for its production and to its use.

10 Modern biomedical science is distinguished by bringing natural organic fluids and tissues into contact with synthetic articles in order to imitate or influence defined physiological processes. Examples include the insertion of implants, extracorporeally used medical appliances or the *in vitro* cultivation of particular cell cultures in an artificial environment.

15 The principle applying in these cases is that greater compatibility between the natural and the synthetic substances leads to a better result. Biocompatibility thus relates to the specific use of a technically defined material in a physiologically defined environment with the aim of assisting or replacing specific physiological functions. Thus, for example, the surface for an orthopedic prosthesis would ideally be designed so that it is able to become incorporated in the bone as quickly as possible, but at 20 the same time the risk of infection should be low. The biological compatibility of a stent for coronary arteries would be optimal if its thrombogenicity is only slight or absent and there is minimal or absolutely no influence on the function of the cells in 25 the direct vicinity, for example the endothelial cells; in particular, proliferation of cells of the so-called intimal layer of the vessel wall should be avoided.

30 Another success of modern medicine is the temporary replacement of organs or their functions by medical appliances, for example hemodialysis, cardiac bypass or extracorporeal membrane oxygenation (ECMO). In these cases too there is a direct relation between biocompatibility and the incidence of complications, some of which are life-threatening, such as hemolysis

03521086 030700

or hemorrhagic complications as a result of iatrogenic anticoagulation induction.

In the past there have been many approaches to solving the problems described, at least in part. Thus, the research group of Dunn et al. attempted in 1994 (Ciprofloxacin Attachment to Porous-Coated Titanium Surfaces, D.S. Dunn, S. Raghavan, R.G. Volz, Journal of Applied Biomaterials, Vol. 5, 325-331, 1994) to modify a titanium surface in order to deposit the antibiotic ciprofloxacin thereon.

Constrictions in the coronary vessels of the heart in particular are nowadays treated to an increasing extent by the implantation of stents. These stents consist of medical stainless steel, tantalum, Nitinol or titanium (see DE-A-195 33 682, DE-A-196 53 708, Characteristics of metals used in implants, I. Gotman, J. Endourol., 11(6):383-389; and US-A-5,356,433). However, two serious complications may occur when they are used. On the one hand, blood coagulation is activated by the metal. This may lead to blockage of the stent by a thrombosis especially within the first four days after implantation. The second problem on use of coronary stents is restenosis due to intimal hyperplasia. The coronary vessel of the heart is composed of three layers of tissue, the intima, media and adventitia. The intima consists of endothelial cells which line the lumen of the vessel and are in direct contact with the bloodstream. The boundary between it and the media, which consists of smooth muscle cells, is formed by the so-called internal elastic lamina. The outer layer, adventitia, then forms the connection between the vessel and surrounding tissue. Histological investigations show that introduction of stents leads to a lesion of the endothelial layer of the intima and, in particular, of the internal elastic lamina. The body reacts to this irritation with a proliferation of intimal cells, which is called intimal hyperplasia, which may be so exten-

sive that renewed blockage of the lumen of the vessel takes place inside the stent.

Technical attempts have been made to reduce the tendency to thrombosis and/or intimal hyperplasia by various coatings on stents. Thus, EP-A-0 836 839 discloses a gold layer on a stent. Antithrombogenic Coating of Stents Using a Biodegradable Drug Delivery Technology, R. Herrmann, G. Schmidmaier, B. Märkl, A. Resch, I. Hähnel, A. Stemberger, E. Alt; Thromb. Haemost., 82, 51-57, 1999 discloses stents with steel or gold surfaces coated with biodegradable polylactic acid. The article "Local drug delivery of argatroban from a polymeric-metallic composite stent reduces platelet deposition in a swine coronary model", K.R. Kruse, J.J. Crowley, J.F. Tanguay, R.M. Santos, D.S. Millare, H.R. Phillips, J.P. Zidar, R.S. Stack, Catheter Cardiovasc. Interv., 46(4), 503-7, 1999 relates to a polymer-metal stent which is provided with argatroban. The antiproliferative agent Taxol and the antiinflammatory substance dexamethasone have, besides the anticoagulant medicament heparin (DE-A-195 33 682), been applied to stents, cf. Antiproliferative stent coatings: Taxol and related compounds, C. Herdeg, M. Oberhoff, K.R. Karsch, Semin. Interv. Cardiol., 3, (3-4), 179-9, 1998; and Anti-inflammatory Stent Coatings. Dexamethasone and Related Compounds, S.H. Park, A.M. Lincoff, Semin. Interv. Cardiol., 3(3-4):191-5, 1998. A stent provided with a coating of silicon carbide has also been investigated in clinical studies on the reduction of endothelial proliferation and platelet activation, cf. Silicon carbide-coated stents: clinical experience in coronary lesions with increased thrombotic risk, B. Heublein, C. Ozbek, K. Pethig, J. Endovasc. Surg., 5(1), 32-6, 1998; and Silicon-carbide coated coronary stents have low platelet and leukocyte adhesion during platelet activation, S.H. Monnick, A.J. van Boven, H.O. Peels, I. Tigchelaar, P.J. deKam, H.J. Crijns, W. van Oeveren, J. Investig. Med., 47(6), 304-10, 1999.

Coated stents are also described in Coated stents: local pharmacology, V.K. Raman, E.R. Edelman, Semin. Interv. Cardiol., 3(3-4), 133-7, 1998; In vivo evaluation of a fluorine-acryl-styrene-urethane-silicone antithrombogenic coating material copolymer for intravascular stents, T. Matsushashi, H. Miyachi, T. Ishibashi, K. Sakamoto, A. Yamadera, Acad. Radiol., 3(7), 581-8, 1996; and Antithrombogenic coating of stents using a biodegradable drug delivery technology, R. Herrmann, G. Schmidmaier, B. Markl, A. Resch, I. Hahnel, A. Stemberger, E. Alt, Thromb. Haemost., 82(1), 51-7, 1999.

Besides these approaches, attempts have also been made to cover surfaces with covalently modified albumin, cf. The Potent Platelet Inhibitory Effects of S-Nitrosated Albumin Coating of Artificial Surfaces, N. Maalej, R. Albrecht, J. Loscalzo, J.D. Folts, J.A.C.C., 33(5), 1408-1414, 1999; and Adherence and Proliferation of Endothelial Cells on Surface-Immobilized Albumin-Heparin Conjugate, G.W. Bos, N.M. Scharenborg, A.A. Poot, G.H.M. Engbers, J.G.A. Terlingen, T. Beugeling, W.G. Van Aken, J. Feijen, Tissue Engineering, 4(3), 267-279, 1998. In Hydration and preferential molecular adsorption on titanium *in vitro*, K.E. Healy and P. Bucheyne, Biomaterials 1992, Vol. 13, No. 8, 553-561, the behavior of titanium towards human serum was investigated by surface spectroscopy.

None of the developed methods has yet led to a convincing product on the market. Whereas the occurrence of stent thromboses can at present be treated sufficiently well by systemically administered medications, called platelet aggregation inhibitors, there is as yet no satisfactory therapy for restenosis due to intimal hyperplasia.

The problems described above are solved according to the invention by an article comprising a substrate which is coated at least partly with at least one layer, and on which there is at least partly a

protein-, peptide- and/or saccharide-containing substance, where the layer directly adjacent to the substance comprises at least one metal selected from titanium, zirconium and hafnium, or a compound thereof
5 with one or more nonmetals and/or semiconductors, or an alloy thereof with one or more other metals, and has been applied by means of a vacuum coating process. The invention additionally relates to a process for producing the article, in which a substrate is at least
10 partly coated with at least one layer, and subsequently a protein-, peptide- and/or saccharide-containing substance is applied at least partly to the coated substrate, where the layer directly adjacent to the substance is applied using at least one metal selected
15 from titanium, zirconium and hafnium, or a compound thereof with one or more nonmetals and/or semiconductors, or an alloy thereof with one or more other metals at a temperature of from 20 to 500°C under vacuum. The invention moreover relates to the use of the article
20 for implantation, insertion or attachment in or on the animal or human body or for bringing into contact with animal or human blood or tissue or animal or human cells. The invention further comprises the use of a protein-, peptide- and/or saccharide-containing
25 substance for application to a layer as defined above. Preferred embodiments of the invention are described in the following description, the figures, the examples and the dependent claims.

In the figures,

- 30 Fig.1 shows a diagrammatic representation of a preferred article according to the invention;
Fig.2 shows a graphical depiction of the results obtained in Example 1 described hereinafter;
and
35 Fig.3 shows a graphical depiction of the results obtained in Example 2 described hereinafter.

An article is intended to mean for the purpose of the invention every appliance or every device which comes into contact, even for a short time, with human

5

10

15

20

25

30

35

The thickness of the layer is preferably in the range between 0 and 5 μm , more preferably from 50 to

3000 nm, very preferably from 100 to 1000 nm. Such a layer thickness ensures that flexing of the particular article can also be tolerated without damage.

5 The layer preferably has a specific resistance in the range from 10 to $10^7 \mu\Omega\text{cm}$, preferably from 50 to 100,000 $\mu\Omega\text{cm}$, particularly preferably from 50 to 10,000 $\mu\Omega\text{cm}$. The specific resistance can easily be adjusted by the skilled person by altering the content of oxygen, nitrogen and/or carbon within the scope of
10 experiments customary in the art. Measurements have shown that blood platelet adhesion has a maximum at 1000-10,000 $\mu\Omega\text{cm}$. The article can be adapted to the electrophysiological conditions by altering the electrical conductivity. The article can be adapted to the
15 physicochemical conditions by supplementing the layer with the protein-, peptide- and/or saccharide-containing substances provided according to the invention, which are also assisted where appropriate by agents with an antibiotic or pharmacological action.

20 The layer is present as a thin layer on a substrate. Suitable substrates are made of a metal such as molybdenum, silver, gold, copper, aluminum, tungsten, nickel, chromium, zirconium, titanium, hafnium, tantalum, niobium, vanadium, iron or mixtures or alloys
25 thereof, in particular stainless steel or Nitinol, or of a polymer such as polyester, polyamide, polyurethane (PU), polyethylene (PE), polytetrafluoroethylene (PTFE) or DACRON®. The substrate preferably consists of stainless steel, in particular medical stainless steel,
30 tantalum, Nitinol, titanium, gold or polymer. The layer is preferably applied to a rough substrate surface whose roughness is characterized by a random distribution of the deviations from the average level, and the standard deviation of this distribution is in
35 the range 0.5-50,000 nm, preferably 40-1200 nm. The substrate is at least partly, preferably completely, coated with the layer.

A layer which is directly adjacent to the substance and has been applied by a vacuum coating

09521086 030700

process is also intended to mean for the purpose of the invention a layer which, after its application by a vacuum coating process, has been subjected to a natural aging process by breaking the vacuum, preferably in air or storage under normal conditions.

In a preferred embodiment, an intermediate layer is provided between substrate and layer, which has a greater adhesive strength. This intermediate layer consists of a metal, preferably of chromium, copper, nickel, molybdenum, tantalum, niobium, silver or alloys of these metals or a semiconductor, for example silicon.

Suitable protein-, peptide- and saccharide-containing substances are albumin; fibrinogen; heparins; collagen; blood proteins, for example alpha-2 globulin; immunoglobulins such as IgG, IgM, IgE IgA and proteins of the complement system, cytokines, interleukins and interferons; glycoproteins such as ferritin and lactoferrin; salivary proteins such as lysozyme, IgA2, mucin and glandulin; and/or alpha-1 proteinase inhibitors. These substances may be present either alone or in a mixture thereof. The preferred substances are albumin, fibrinogen, heparin or a mixture thereof. Albumin is most preferred, especially a mixture of albumin with fibrinogen, heparin and/or one or more of the other abovementioned substances, in particular albumin with fibrinogen. Albumin is a protein which is very soluble in water, is highly hydrated, is difficult to salt out, has an elliptical shape and a molecular weight of about 660,000, and has a content of sulfur-containing amino acids, an isoelectric point of 4.6 and ampholytic behavior. Particularly suitable albumins are human albumin, bovine albumin, pig albumin, chicken albumin, dog albumin, or albumin from cats, monkeys, guinea pigs, mice, turkeys, hamsters, rhesus monkeys or sheep. Human albumin is most preferred.

The substance is present on the layer at least in part, preferably completely.

09521086-030700

05 SEP 1986 030700

The article according to the invention reduces foreign-body reactions and allows a wide variety of desired properties to be generated. Thus, for example, the restenosis rate is reduced to 53% by combining 5 albumin, preferably human albumin, with a TiN_xO_y layer on a stent substrate of medical stainless steel, where x and y are as defined above (cf. Example 3 hereinafter). Other proteins, such as fibrinogen, reduce the adhesion of certain bacterial strains (cf. Example 2 10 hereinafter). This is particularly relevant for example to various catheters in the region of urogenital tract or blood system or to implants in the region of the respiratory tract.

To produce the article, the layer is applied by 15 a vacuum coating process to the substrate. This expediently takes place by PVD (*physical vapor deposition*), CVD (*chemical vapor deposition*), PECVD (*plasma enhanced chemical vapor deposition*) or ion plating, in particular by PVD processes such as 20 reactive vapor deposition, sputtering, reactive plasma processes or the process described in DE-A-195 06 188. Particularly suitable for applying the layer to the substrate is the following process: the substrate is positioned in a vacuum chamber and heated to 20 to 25 500°C, preferably to 100 to 400°C, particularly preferably 200 to 350°C. For the coating, the metal or the alloy as defined above is vaporized in the chamber via vaporization, preferably electron beam vaporization, under a vacuum of from 10^{-5} to 10^{-2} mbar, preferably 30 from 10^{-4} to 10^{-2} mbar, particularly preferably from 10^{-4} to 5×10^{-3} mbar. If compounds are to be applied, the corresponding gases, oxygen, nitrogen and/or carbon-containing gases such as, for example, ethyne or carbon dioxide, are introduced into the vacuum chamber. The 35 procedure in this case for generating the required chemical composition of the compound is preferably as follows:

The chemical composition is generally determined by the parameters:

r_M - rate of vaporization of metal M
 a_{GM} - affinity of gas type G for metal M
 $U_{pi}I_p$ - voltage and current of any plasma which has
 been ignited

5 T_s - substrate temperature
 I - vaporizer-substrate distance
 P_{tot} - total gas pressure
 and

P_G - partial pressure of gas type G
 10 where the latter variable is determined by
 f_G - mass flux of gas type G
 L_G - pumping capacity of the vacuum pump for gas
 type G

The skilled person can determine from this experi-
 15 mentally the function "process composition" for each
 vacuum chamber and for each use. If a metal M and a gas
 G are involved (for example titanium and oxygen), the
 multidimensional parameter space described above can be
 reduced to a linear two-dimensional problem. For
 20 example, for the titanium/oxygen system in the
 parameter range

$r_{titan} = 0.1-10$ mm/s
 $T_s = 20^\circ\text{C}-500^\circ\text{C}$
 $I = 20-120$ cm
 25 $P_{tot} = 10^{-5}-10^{-2}$ mbar

the chemical composition is a linear function of the
 oxygen flux f_{O_2} controlled by a flow control device.
 This relationship can be described by a parameterized
 family of curves

30
$$v = 0.0245 \times (f_{O_2} + t) - 0.879$$

where v describes the particle ratio of oxygen to
 titanium in the layer, f_{O_2} describes the oxygen flux
 which has been made dimensionless (oxygen flux without
 dimension) and t describes a family of curves parameter
 35 which described the pump capacity of the chamber and
 geometry. In this system, the specific resistance p
 (without dimension) of the layer can also be described
 as a function of the chemical composition:

09521086"030700

$$v = 0.357 \ln(p) - 2.1987$$

On addition of a second gas, the different affinities (a_{GM1} , a_{GM2}) between the metal M and the two gas types $G1$ and $G2$ are taken into account. The ratio of a_{GM1} to a_{GM2} determines the parameter space in which there is a linear relation between chemical composition in the layer and the fluxes of the two gas types. On use of more than two gas types and/or more than one metal type it is possible by stochastic optimization algorithms, for example genetic algorithms, to examine the parameter space experimentally in order to find parameter space regions which lead to the desired properties. In this case, the adjustment of the required ratio of amounts of the gases preferably takes place by flow control devices, for example so-called mass flow controllers. It may in some cases be advantageous to ignite a plasma. Deposition of the layer on the substrate takes place in a conventional vacuum deposition apparatus familiar to the person skilled in this art.

The layers applied to the substrate may still be chemically unstable and undergo an aging process shortly after the application and removal from the vacuum chamber. Thus, for example, titanium undergoes passivation to titanium oxide or TiO_2 , and this process may take hours or even days.

The protein-, peptide- and/or saccharide-containing substance is then applied to the coated substrate. In a preferred embodiment, the substance is applied immediately or soon after the application of the layer. This preferably takes place from 1 minute to 1 week, particularly preferably 1 minute to 5 hours, after the application of the layer or removal of the coated substrate from the vacuum chamber. Suitable processes for applying the substance in solution are dipping and spraying. The substance is expediently applied by introducing the coated substrate into a solution containing the substance. Suitable solutions contain 1-70% by weight, preferably 1 to 40% by weight,

in particular 1 to 35% by weight, of the substance based on 100% by weight of solution. A solution containing 1-30% by weight of human albumin, in particular 1 to 15% by weight of human albumin, based on 100% by weight of solution, is preferably used. Besides the substance described above, the solution contains water and, where appropriate, salts, electrolytes and/or buffers. The albumin may be in the form not only of a solution for application but also of a powder produced, for example, by heat shock or (salt) crystallization. In the latter case, the powder is distributed on the layer and then the article is stored in a humidity chamber. It is also possible for parts of the substance to be denatured, which extends the range of applications. Thus, denatured fibrinogen may inhibit blood platelet aggregation on the surface. The substance can also be applied by bringing the coated substrate into contact with a gaseous mixture of the required substance. It is also possible to add depot agents, for example anticoagulant substances or antibiotics, to the substance, which are then released continuously.

When the substance is applied by dipping in a solution, the article is stored there for from a few seconds to several days at temperatures from -12 to +20°C, preferably from 0 to +7°C. The article can be marketed with the solution. In this form, it is stable for at least one month. In a preferred embodiment of the invention, the article is designed as an implant, in particular as a stent.

The article according to the invention can be used for implantation, insertion or attachment in or on the animal or human body or for bringing into contact with human or animal blood or tissue or human or animal cells. It is used in particular for implantation, insertion or attachment in or on the animal or human body.

The invention also relates to the use of a protein-, peptide- and/or saccharide-containing

substance for application, in particular addition or deposition, to a layer which is defined as described above. The substance in this case is defined as described above. It is preferably selected from albumin, fibrinogen and heparin, with albumin being most preferred.

Figure 1 shows diagrammatically the structure of an article which is preferred according to the invention and has the substrate (3) which is coated with the PVD layer (2) and on which the substance (1) is located.

The invention is explained in detail by means of the following examples, which represent preferred embodiments of the invention.

Example 1:

Medical steel 1440 was mounted on a specially produced substrate holder and placed in a vacuum chamber. After evacuation of the chamber to 10^{-5} mbar, the substrate was heated to 400°C . Titanium was vaporized at a rate of 0.5 nm/s using an electron gun. A nitrogen flux of 150 sccm (standard cm^3) and an oxygen flux of 35 sccm were fed in using mass flow controllers. The pressure reached in the process was 10^{-3} mbar. A $\text{TiN}_{0.95}\text{O}_{0.15}$ layer with a specific resistance of $1000 \mu\Omega\text{cm}$ was applied in this way. The layer had a thickness of 1 μm .

The sample was then incubated with 1% human albumin solution (% by weight) at room temperature for 1 hour and subsequently dried. After the incubation with albumin, the sample was rinsed with phosphate buffer (PBS) and thus excess unbound albumin was washed off.

The sample was then cut into 5 rectangles ($l \times b \times h = 76 \times 38 \times 0.2$ [mm]), of which 4 samples were incubated with filtered human plasma for 1, 2, 3 and 4 days respectively. The platelet adhesion on these 4 samples, and on the 5th sample which had been incubated only with the albumin (and not with the human

plasma), was measured. This was done by flushing citrate-anticoagulated human blood over the particular sample in a flow chamber (0.6 mm x 38 mm in size). The flow rate was 39.67 ml/min. Perfusion lasted 5 minutes in each case and took place at a temperature of 37°C. After the perfusion, the particular sample was rinsed with Hepes/NaCl. Comparative samples comprised untreated substrates, that is to say medical steel of the same size and incubated and measured in the same way as the sample with human plasma.

The samples and comparative samples treated in this way were then fixed and the amount of blood platelets adhering to the samples was quantified by fluorescence microscopy and stated as % of area covered relative to the total area.

The results are depicted in Figure 2, where the platelet adhesion is plotted in [%] against the time in [days]. It is evident from Figure 2 that platelet adhesion to the article according to the invention is reduced even after 1 day.

Example 2:

The surface of medical steel 1440 was coated in a vacuum chamber as in Example 1, but the amounts of nitrogen and oxygen etc. fed in are indicated in the table below. The pressure reached in this process was 10^{-3} mbar. It was possible by altering the process parameters as specified in DE-A-195 06 188 to produce layers differing in conductivity. The layer thickness was 10^{-6} m. Coated substrates with the resistances stated in the following table were obtained in this way.

No.	Specific resistance ($\mu\Omega\text{cm}$)	Composition Ti:N:O	N ₂ mass flux [sccm]	O ₂ mass flux [sccm]
1	6×10^1	1:0:0.01	-	-
2	2×10^3	1:0.8:0.2	108	44
3	6×10^3	1:0.12:1.32	35	90
4	5×10^4	1:0.01:1.88	5	140
5	2×10^5	1:0:2.05	2	120

In addition, a further 5 coated substrates were produced with the resistances depicted in Fig. 3.

5 Substance was deposited according to the invention on 5 samples, the samples being incubated in a solution containing purified human fibrinogen (grade L, KabiVitrum, 33 g of human fibrinogen/100 ml of potassium phosphate) for 30 min. The other 5 samples
10 were not treated with the substance (fibrinogen) and acted as comparative samples.

The samples and comparative samples were then investigated in a flow chamber (dimensions: $1 \times b \times h = 76 \times 38 \times 0.6$ mm) for adhesion of the
15 bacterial strain Staphylococcus epidermidis 11047. This entailed the bacterial solution flowing over the samples and comparative samples at a flow rate of 2 ml/min for 5 hours and being quantified.

The results are depicted in Figure 3, where the
20 total adhesion in [bacteria/cm²] is plotted against the specific resistance in [$\mu\Omega\text{cm}$] of the sample. It is evident from this that the samples according to the invention show distinctly reduced adhesion.

25 Example 3:

Commercially available coronary stents were coated as described in Example 1 to result in the same specific resistance and the same layer thickness. After venting the vacuum chamber with nitrogen, the stents
30 were placed in a solution containing 5% by weight human albumin and sealed.

The stents were implanted into the coronary vessels of the hearts of 20 pigs. At the same time, untreated control stents, that is to say stents without coating and without substance, were implanted in the pigs. After six weeks, the intimal hyperplasia induced by the stents and control stents was measured. To do this, samples were taken from the vessel wall immediately upstream of the implanted stents and within the implanted stents, and histological specimens were prepared. The thickness of the intimal layer in the histological specimens was measured. Comparison between the stents according to the invention and the control stents showed a reduction in the intimal hyperplasia by 53% in the stents according to the invention. The result was significant with $p < 0.04$.

004000" 98072560

Patent claims

1. An article comprising a substrate which is coated at least partly with at least one layer, and on which there is at least partly a protein-, peptide- and/or saccharide-containing substance, where the layer directly adjacent to the substance comprises at least one metal selected from titanium, zirconium and hafnium, or a compound thereof with one or more nonmetals and/or semiconductors, or an alloy thereof with one or more other metals, and has been applied by means of a vacuum coating process.
2. An article as claimed in claim 1, wherein the metal is titanium.
3. An article as claimed in claim 1 or 2, wherein the layer comprises compounds of at least one metal selected from titanium, zirconium and hafnium with at least one element selected from nitrogen, oxygen and carbon, where the compounds have the formula $MC_xN_yO_z$, where M = Ti, Zr and/or Hf; x, y, z = 0.0 to 2.1; and $x+y+z = 0.01$ to 4.
4. An article as claimed in any of claims 1 to 3, wherein the layer has been applied by PVD, PECVD or CVD.
5. An article as claimed in any of the preceding claims, wherein the thickness of the layer is between 0 and 5 μm .
6. An article as claimed in any of the preceding claims, wherein the specific resistance of the layer is between 10 and $10^7 \mu\Omega\text{cm}$.
7. An article as claimed in any of the preceding claims, wherein the layer which is directly adjacent to the substance and has been applied by the vacuum coating process has undergone an aging in air.
8. An article as claimed in any of the preceding claims, wherein the at least one substance is selected from albumin, fibrinogen and heparin.

10. An article as claimed in any of the preceding
5 claims, wherein the substrate consists of stainless
steel, tantalum, Nitinol, titanium, gold, and/or
polymer.

12. A process for producing an article as claimed in any of the preceding claims, wherein a substrate is at least partly coated with at least one layer, and subsequently a protein-, peptide- and/or saccharide-containing substance is applied at least partly to the coated substrate, where the layer directly adjacent to the substance is applied using at least one metal selected from titanium, zirconium and hafnium, or a compound thereof with one or more nonmetals and/or semiconductors, or an alloy thereof with one or more other metals at a temperature of from 20 to 500°C under vacuum.

25 14. A process as claimed in claim 13, wherein the
solution contains from 0.5 to 40% by weight of the
substance, based on 100% by weight of solution.

16. A process as claimed in any of claims 12 to 15, wherein the substrate, the layer and the substance are as defined in any of claims 2 to 10.


17. The use of an article as claimed in any of
35 claims 1 to 11 for implantation, insertion or
attachment in or on the animal or human body or for
bringing into contact with human or animal blood or
tissue or human or animal cells.

Abstract

The invention relates to an article, in particular an implant, comprising a substrate which is coated at least partly with at least one layer, and on which there is at least partly a protein-, peptide- and/or saccharide-containing substance, where the layer directly adjacent to the substance comprises at least one metal selected from titanium, zirconium and hafnium, or a compound thereof with one or more non-metals and/or semiconductors, or an alloy thereof with one or more other metals, and has been applied by means of a vacuum coating process. Also provided is a process for producing the article, in which the layer is applied to the substrate under vacuum, and the use of the article.

004080 00012560

Figure 1

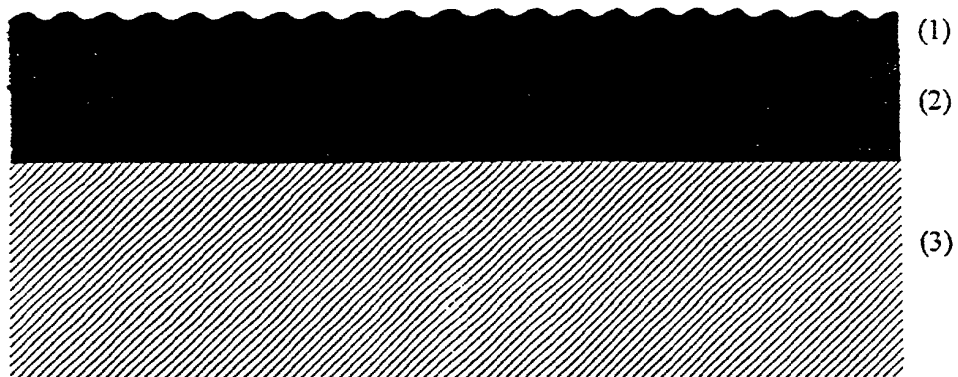

004050" 98072560

Figure 2

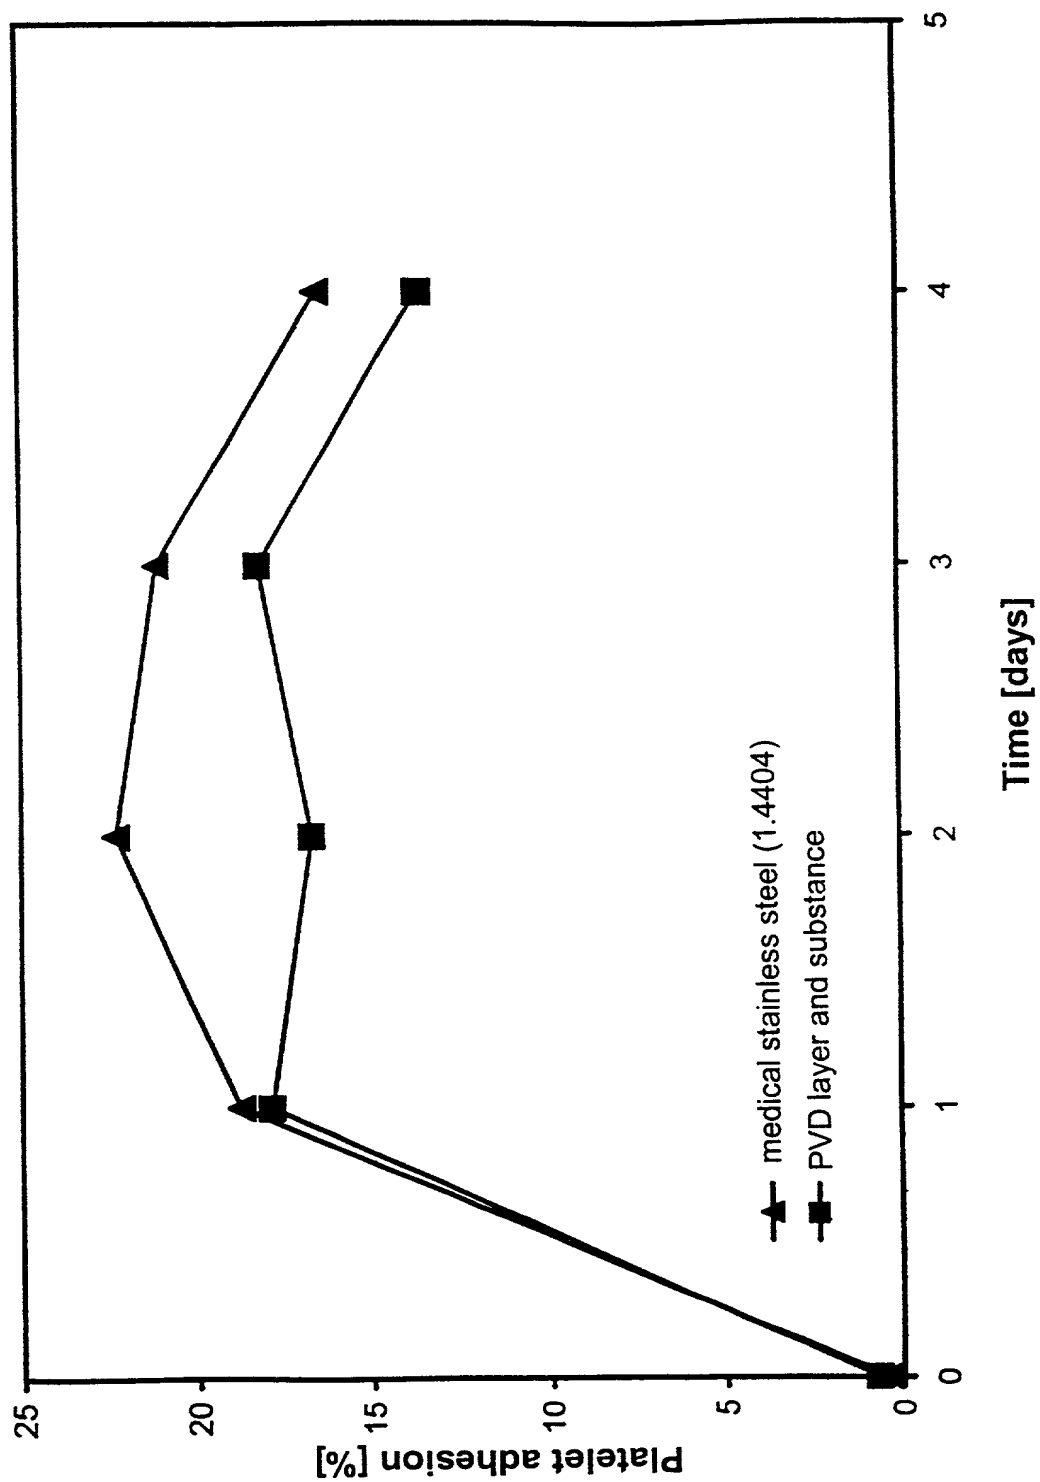


Figure 3

